

SCREEN₄PRO

Vslim Series


SCREEN₄PRO



**Indoor fixed
installation**

Shenzhen SCREEN4PRO Technology Co., Ltd
Email: sales@screen4protech.com Web: www.screen4protech.com
Add: Songnan Innovation Industrial Park, Guangming District, Shenzhen, China

Shenzhen SCREEN4PRO Technology Co., Ltd

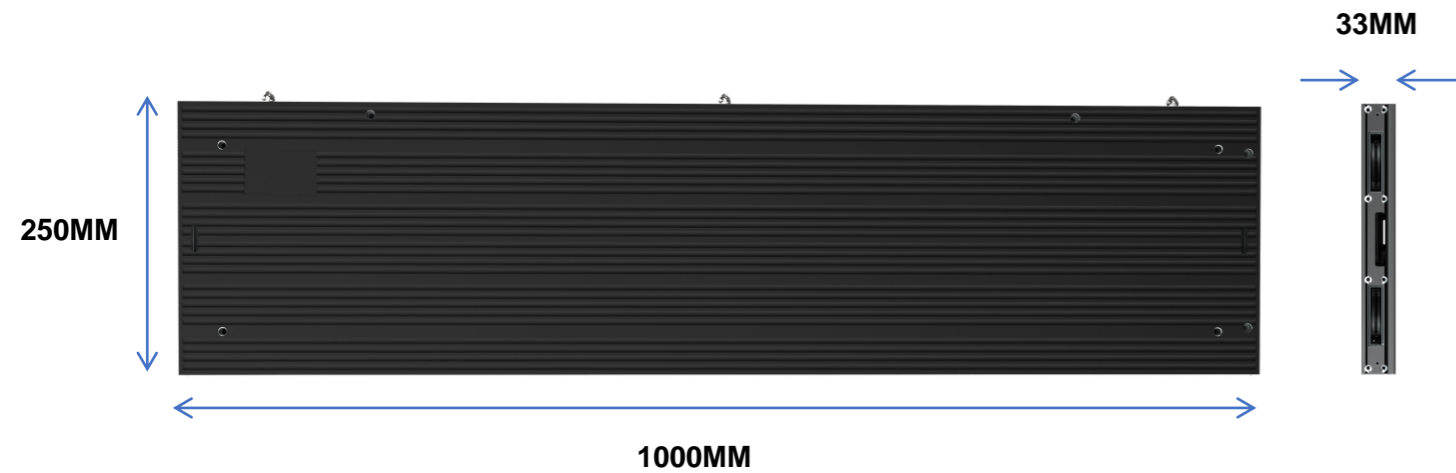


Front side High contrast

- High contrast corrugated light absorbing mask achieves high contrast



Multiple cabinet size options

- Compatible with various sizes of installation, strong flexibility

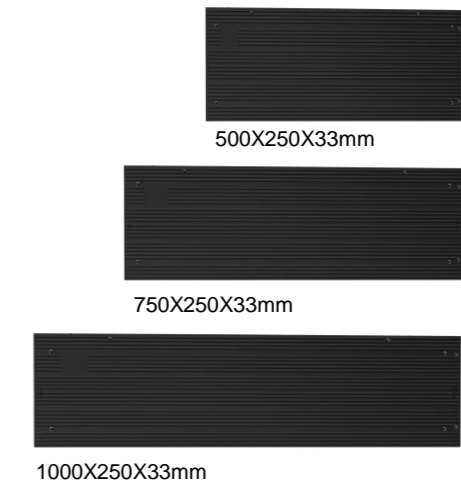

Ultra light weight

- Cabinet weight : 500x250 2.9kg 750x250 4.5kg 1000x250 5.8kg




Front maintenance

- Full front access makes the maintenance is easier



160° Super wide viewing angle

- Perfect presentation of images from any angle

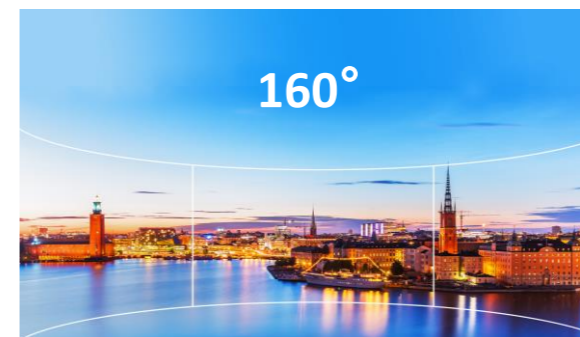

Double-sided design

- Synchronous or asynchronous Double-side screen design for more commercial advertisement opinions



Pixel Pitch	P1.25mm	P1.56mm	P1.95mm	P2.5mm	P2.604mm	P2.976mm	P3.91mm
LED Type	SMD/GOB	SMD/GOB	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020
Physical Density(Dot/sqm)	640000	409600	262144	160000	147456	112896	65536
Module Resolution	200x200	160X160	128X128	100X100	96X96	84X84	64X64
Module Dimension(mm)	250X250						
Panel Size(mm)	1000X250X33 750x250x33 500x250x33						
Panel Weight	23.2kg/sqm						
Cabinet Material	Aluminum Profile						
Brightness(Nits)	600	600	800	800	800	800	1000
Color Temperature(K)	3200-9300 Optional						
Gray Level(Bits)	14-16						
Viewing Angle(V/H)	160°/160°						
Brightness/Color Uniformity	≥97%						
Contrast	10000 : 1						
Frequency	50/60						
Refresh Rate(Hz)	3840						
Max. Power Consumption(W/sqm)	650						
Avg. Power Consumption(W/sqm)	100-200						
IP Grade	IP31						
Power Input	AC90-264V,47-63Hz						
Working Temperature/Humidity	-20~60°C/10%~85%						
Storage Temperature/Humidity	-20~60°C/10%~85%						
Maintenance	Front access						