


# MS Plus Series

Indoor: 1.95/2.6/2.9/3.9mm

Outdoor: 2.9/3.9/4.8mm

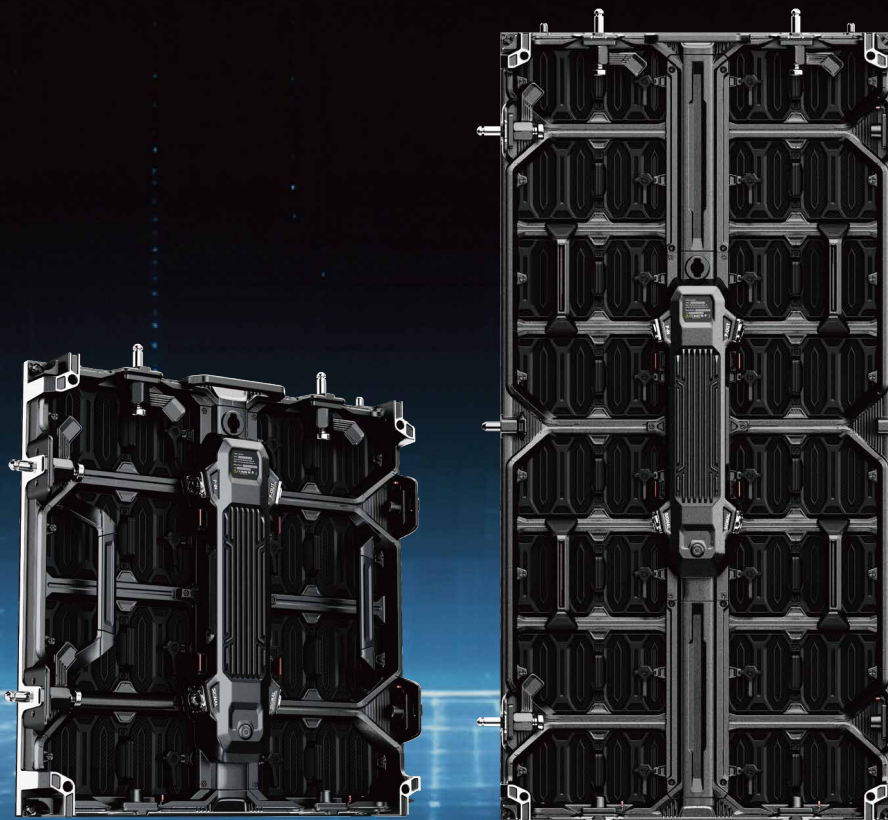

High Refresh Rate



Heat-resistant TG Board



Great Protection



Full Front-Service

## Features:

**Modular Design:**Fast installation with a detachable frame and clip-on power box.

---

**Full Front-Service:**Easy front access for indoor and outdoor maintenance.

---

**Interchangeable Sizes:**Connect 500×500mm and 500×1000mm cabinets side-by-side.

---

**Standard & Flexible Connection:**Seamlessly link “MS Series” and “WS Series” cabinets.

---

**Multifunctional Display:**Supports cubes, +/-10° curves, and multi-cabinet connections.


---

**High Refresh & Brightness:**7680Hz, XR-ready, DCI-P3 > 95%, 1200 nits calibrated.

## Modular Design

---


Fast installation with a detachable frame and clip-on power box.

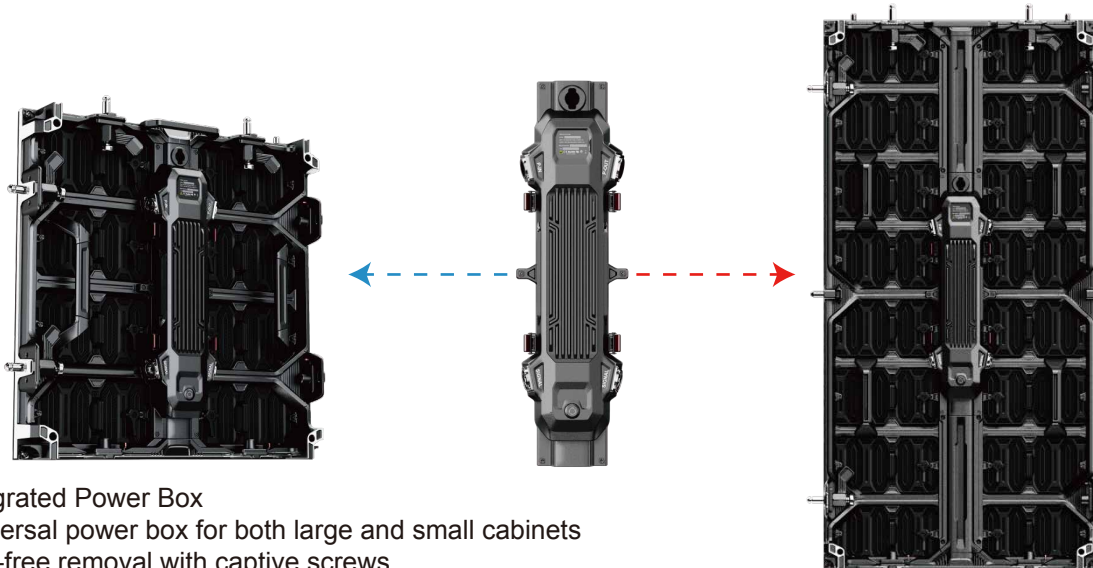

## Full Front-Service

---


Easy front access for indoor and outdoor maintenance.

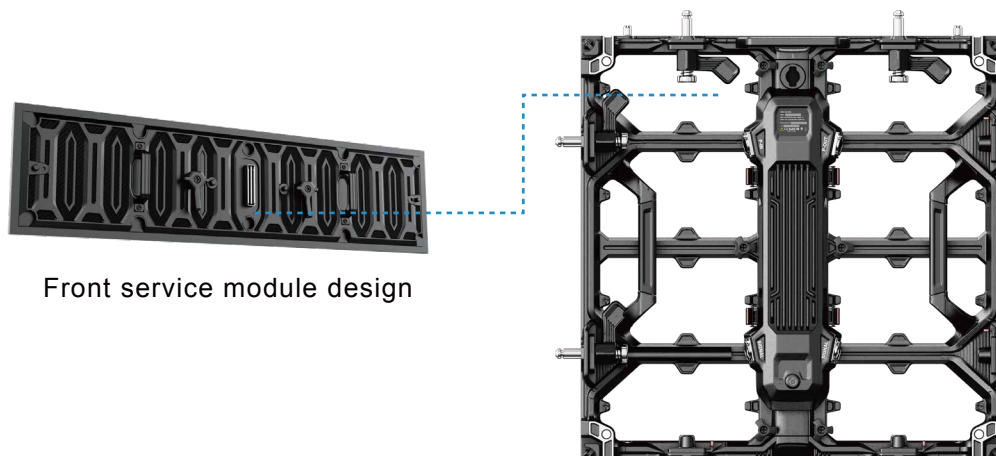

## Interchangeable Sizes

---


500\*500mm and 500\*1000mm cabinet can be connected together from the left & right side

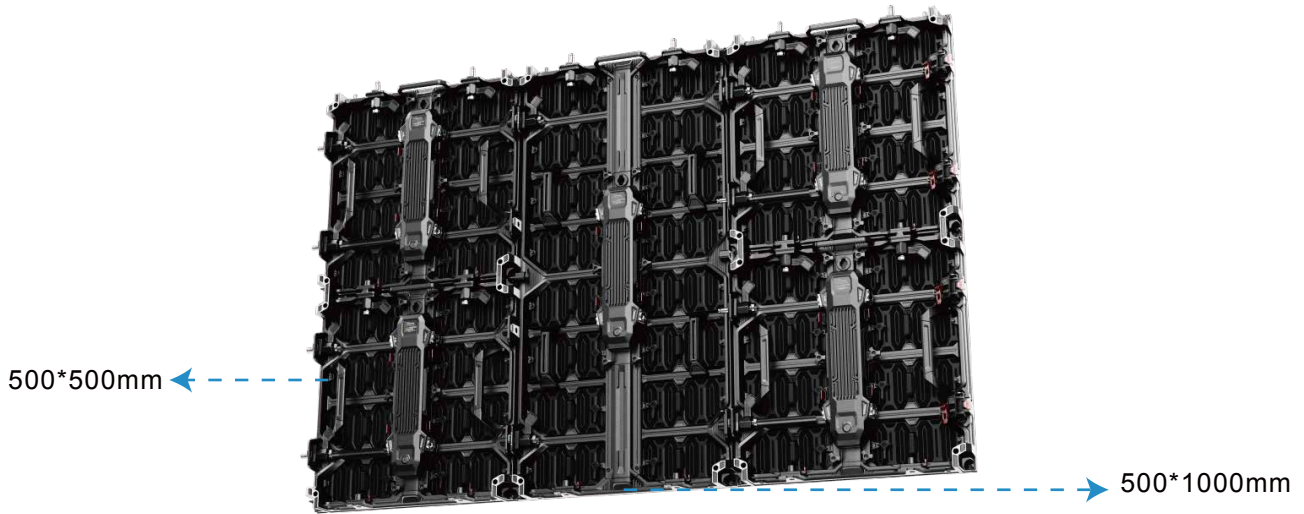

## Standard & Flexible Connection

---


Seamlessly link “VR Series” and “FC Series” cabinets.

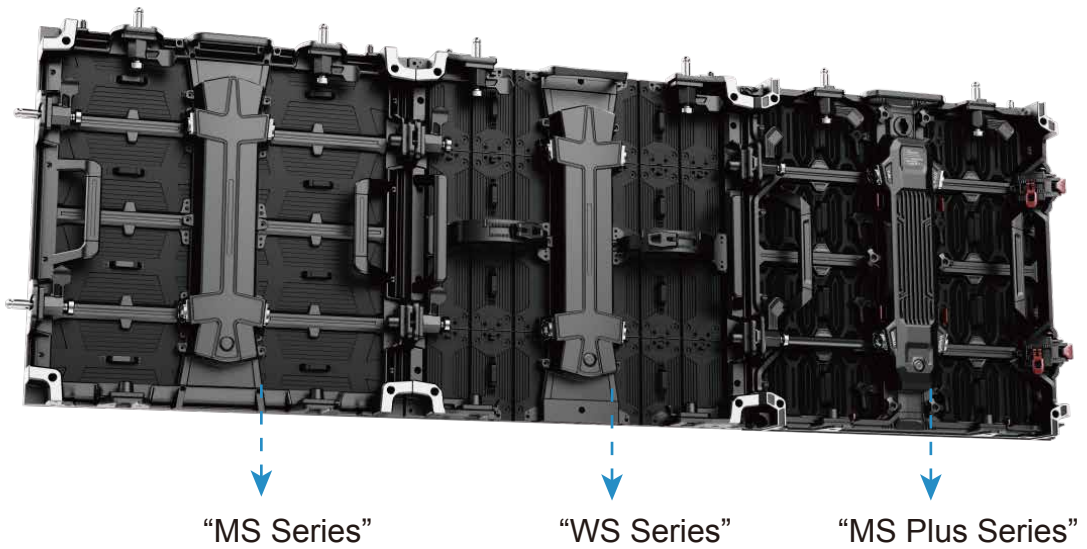

## Multifunctional Display

---

Supports cubes, +/-10° curves, and multi-cabinet connections.

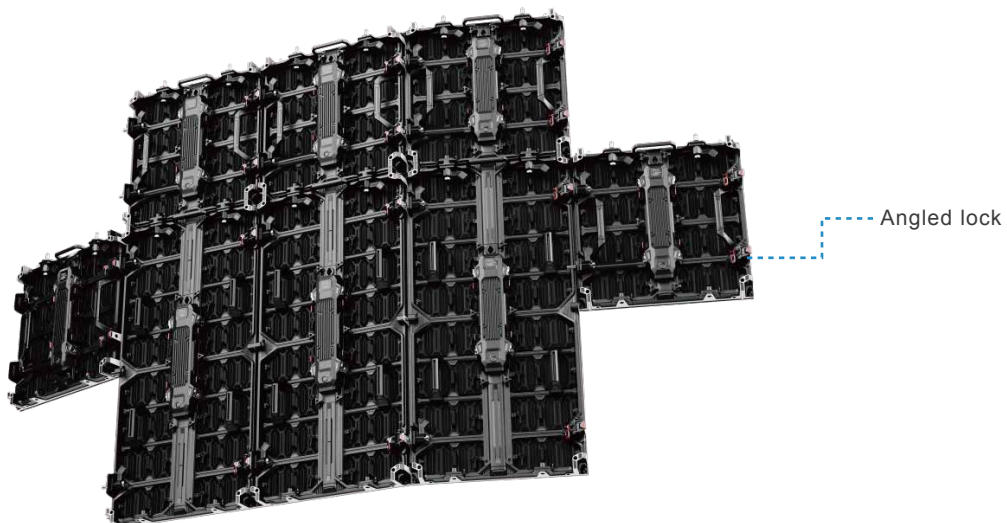


# High Refresh & Brightness

7680Hz, XR-ready, DCI-P3 > 95%, 1200 nits calibrated.




## Mounting Systems

Reliable solutions for secure, adaptable installation.

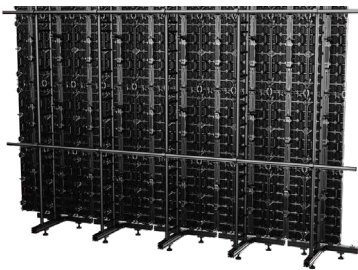

•Ground Stacking System

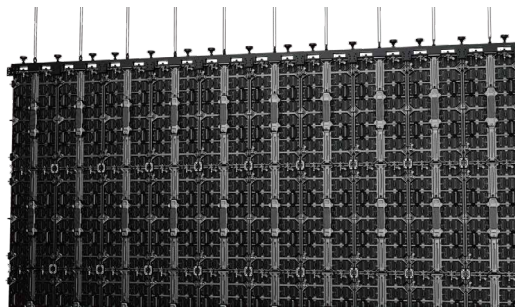

•Hanging System



•Dolly Design

## Specifications

Model	MS Plus Series								
Application Scenarios	Indoor				Outdoor				
Pixel Pitch (mm)	1.953HOB	2.604	2.976	3.91	2.976White LED	3.91White LED	3.91Black LED	3.91White LED	4.8White LED
LED Specifications	SMD1212	SMD1515	SMD1515	SMD2020	SMD1415	SMD1921	SMD1921	SMD1921	SMD1921
Module Resolution (dot)	256*64	192*48	168*84	128*32	168*84	128*32	128*32	128*32	104*26
Module Pixel Count	16384	9216	14112	4096	7056	4096	4096	4096	2704
Module Size (mm)	500*125	500*125	500*125	500*125	500*125	500*125	500*125	500*125	500*125
Pixel Density (dots/m <sup>2</sup> )	262144	147456	112896	65536	112896	65536	65536	65536	43264
Brightness (nits)	600~800	800~1000	800~1000	800~1000	4500~5000	4000~4500	4000~4500	6000~6500	3500~4000
Color Temperature (°)	3500-10000	3500-10000	3500-10000	3500-10000	3500-10000	3500-10000	3500-10000	3500-10000	3500-10000
Viewing Angle (°)	H:160 V:140	H:160 V:140	H:160 V:140	H:160 V:140	H:160 V:140	H:160 V:140	H:160 V:140	H:160 V:140	H:160 V:140
Cabinet Resolution (dot)	256*256	192*192	168*168	128*128	168*168	128*128	128*128	128*128	104*104
Cabinet Size (mm)	500*500*72	500*500*72	500*500*72	500*500*72	500*500*72	500*500*72	500*500*72	500*500*72	500*500*72
Cabinet Material	Die-Cast Aluminum								